

Panic exit devices. Lite series

Rim model. LITE20

Rim panic device with 2 locking points with steel roller bolts. Used when a rim strike can not be installed in the lower locking point.

EN 1125 certification:

3 7 6 B 1 3 2 2 A A

The box includes:


- » 1 main support and a secondary one.
- » 1 oval shape horizontal bar.
- » 2 vertical rods of 1090 mm.
- » Accessories bag includes: Fixing screws, screws with support the horizontal bar, 2 vertical rod guides and strikes.
- » Assembly instructions and installation template.
- » 2 locking points, upper and lower.

Model	Door width	Follower	Cover finish	Bar finish	Product code
LITE20	900	8	Black	Green	LITE20908NV
LITE20	900	8	Black	Black	LITE20908NN
LITE20	900	8	Black	Red	LITE20908NR
LITE20	900	8	Nickel plated	Nickel plated	LITE20908SA
LITE20	900	8	Silver	Silver	LITE20908GG




Configuration



1 leaf door



2 leaf door

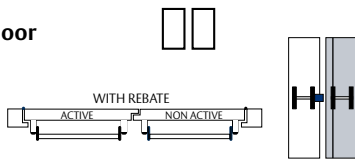

2 leaf door

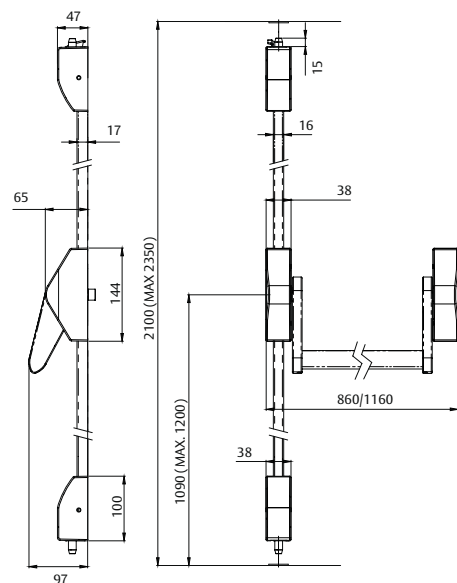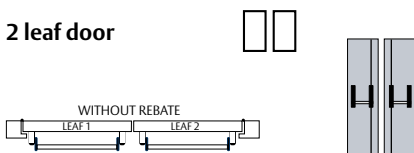

Outside device	Blind plate	Blind lever handle	Modular lever handle
No outside opening	•		
Free passing door		•	•
Cylinder locking	Knob / lever handle opening		•
	Captive Key system		• (1)

(1) It is needed to lock the outside access device to remove the key