

Push type panic exit devices

Rim model: 1910

Rim panic device with a lateral lock point.
Steel swing latch.
Outside devices; see table below.
EN 1125 certification:

3 7 6 B 1 3 2 2 A A

The box includes:

- » 1 main support and another secondary one.
- » 1 oval shaped horizontal bar, 900 mm in length.
- » Accessories: Fixing screws, screws with support the horizontal bar, 1 square spindle and strike.
- » Assembly instructions and installation template.




1910 stainless finish.



Model	Bar length	Square spindle mm	Cover finish mm	Bar finish	Product code
1910	900	8	Black	Green	1910908NV
1910	900	8	Black	Black	1910908NN
1910	900	8	Black	Red	1910908NR
1910	900	8	Black	Chrome plated	1910908NC
1910	900	8	Black	Stainless steel	1910908NI
1910	900	8	Nickel plated	Chrome plated	1910908SC
1910	900	8	Nickel plated	Stainless steel	1910908SI
1910	900	8	Stainless steel	Stainless steel	1910908II
1910	900	8	Silver	Silver	1910908PP
1910	900	8	Brass plated	Brass plated	1910908LT


Highlighted part numbers: "Express 5" service.

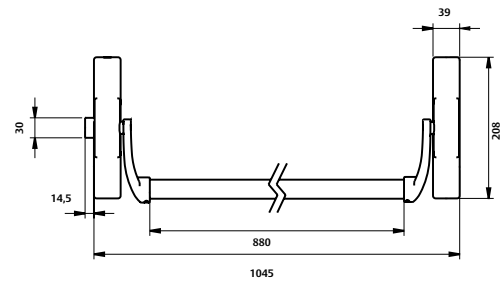

Special model: 191E


- » Rim version 1 locking point - wide cover

Model	Bar length	Square spindle mm	Cover finish mm	Bar finish	Product code
191E	900	8	Black	Green	191E908NV
191E	900	8	Black	Black	191E908NN
191E	900	8	Black	Red	191E908NR

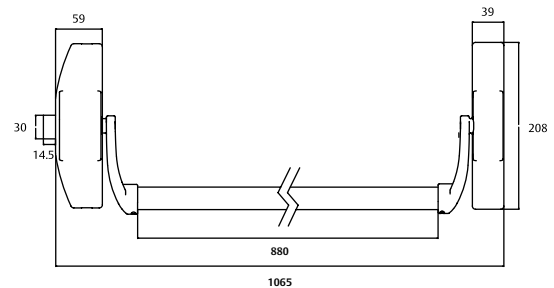


Configuration

1 leaf door



2 leaf door

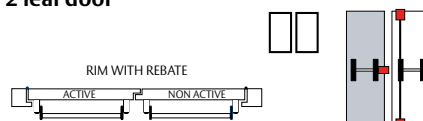

Door configuration for 1910 and 191E models

Outside device	Blind plate	Euro-profile plate	Lever handle with euro-profile	Lever handle	Pull knob with euro-profile	Modular lever handle
No outside opening	•					
Free passing door				•		•
Cylinder locking	Knob / lever handle opening		•			•
	Captive key opening					• (1)
	Key opening		•		•	

(1) It is needed to lock the outside access device to remove the key