


# Single point rim locks /multipoint

## TS10 Series

- » Reinforced steel strike case prevents crowbar attack.
- » Anti-Drill and anti-extraction attack ESTS security escutcheon.
- » Standard rim cylinder fits door widths up to 48mm.
- » Adjustable length rim cylinder models possess an indented connecting bar that can be easily cut to the desired length and reaching up to 80mm. door width.
- » Latchbolt is retracted with the key from the outside and with the pull-handle from the inside.
- » Lock case and staple are gold enamelled steel finished.
- » ESTS security escutcheon finish is satin brass.

Cylinder	Hand	Finish	Product code
T60	R	AE	TS10T6DAE
T60	L	AE	TS10T6IAE
T60	R	AC	TS10T6DAC
T60	L	AC	TS10T6IAC
TE-5	R	AE	TS10REDAE
TE-5	L	AE	TS10REIAE
TE-5	RL	AC	TS10REDAC
TE-5		AC	TS10REIAC

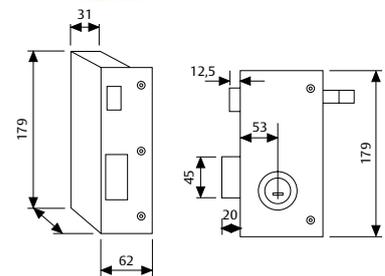

## TS30 - TS50 Series



- » Reinforced steel strike cases prevent crowbar attack.
- » Floor & top jamb locking bolts manufactured in hardened steel. Floor & top jamb strikes in reinforced steel. Floor strike includes dust proof lid.
- » Connecting rods hidden under rod covers.
- » Anti-Drill and anti-extraction attack ESTS security escutcheon.
- » Standard rim cylinder fits door widths up to 48mm.
- » Adjustable length rim cylinder models possess an indented connecting bar that can be easily cut to the desired length and reaching up to 80mm. door width.
- » Latchbolt is retracted with the key from the outside and with the pull-handle from the inside.
- » Lock cases and rod covers are finished in gold enamelled steel.
- » ESTS security escutcheon finish is satin brass.

Cylinder	Hand	FLnLsh	TS30	TS50
T60	R	AE	TS30T6DAE	TS50T6DAE
T60	L	AE	TS30T6IAE	TS50T6IAE
T60	R	AC	TS30T6DAC	TS50T6DAC
T60	L	AC	TS30T6IAC	TS50T6IAC
TE-5	R	AE	TS30REDAE	
TE-5	L	AE	TS30REIAE	
TE-5	R	AC	TS30REDAC	
TE-5		AC	TS30RELAC	

Door length	TS30	TS50
Minimum	1850	1875
Maximum	2215	2140
Special maximum	2460	2460
Finish	AE/AC	AE/AC

The maximum length of 2460 mm is obtained using accessories STS3 and STS5.

