


# Deadlocks

## 514 deadlocks


» Deadlock with ADA turn button inside, making easier the opening. Non bolt through fixing from inside.

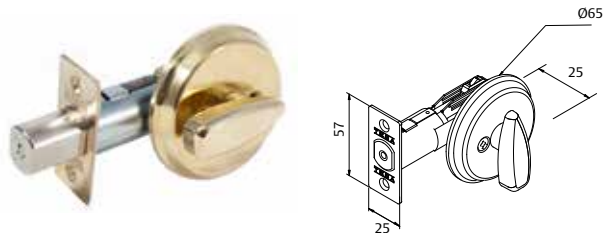

Model	Backset	Finish	Packging
514	U0	CM - CR - LM - LP - NS - LA	20

## 516 deadlocks


» Deadlock with cylinder outside and ADA turn button inside, making easier the opening.

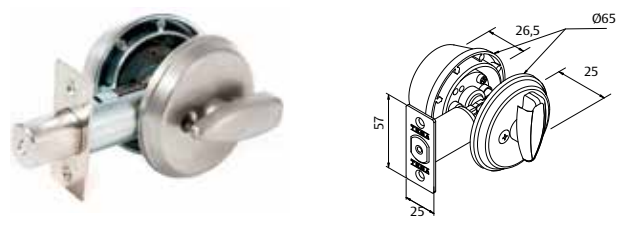

Model	Backset	Finish	Packging
516	U0	CM - CR - LM - LP - NS - LA	20

## 517 deadlocks

» Double cylinder, internal and external key operation.

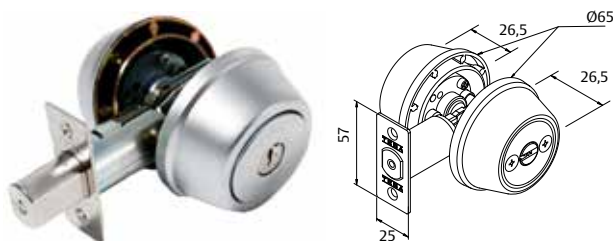

Model	Backset	Finish	Packging
517	U0	CM - CR - LM - LP - LA - NS	20

Features	Standard	Special
Anti-corrosion resistance according ASTM B117/90	CR,CM ....144 hours LP, LM.....96 hours	
Door thickness	33-47 mm in 514 33-52 mm in 516, 517	Up to 72 mm for 514. Up to 70 mm for 516.
ANSI A156.2	Grade 3: 100.000 cycles	
UL	ANSI A156.5	Up to 1,5 hours.
Thumb turn	ADA that makes operation easier	
Cylinder	5 active pins and 3 keys	Security Cylinder: T60, T80, TX80 Masterkeying and keyed alike.
Latchbolt	60/70 Adjustable backset. and with anti saw device	
Accessories	Strike plate, screws, instructions and templates	Rounded strikes
Packaging units	20	

