


Link arm door closer

CT2800

CT2800 door closers stand out for their versatility and stylish design.


- » Classification according EN1154
- » Continuously adjustable size from EN2 to EN5.
- » Unique installation position for all door sizes.
- » For single action doors up to 1250 mm wide
- » Closing speed, latching speed and backcheck adjustable via front facing regulating valves
- » Maximum opening up to 180°
- » CT2801 Includes adjustable hold open arm, cannot be used with fire and smoke protection doors

EN 1154 CERTIFIED
Fire door

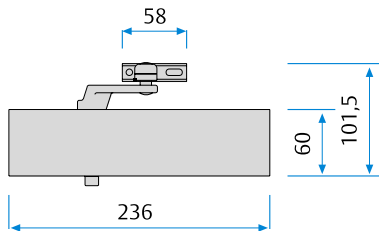


Size	Door width cm	Door weight kg
2	85	40
3	95	60
4	110	80
5	125	100



EN3/4/5

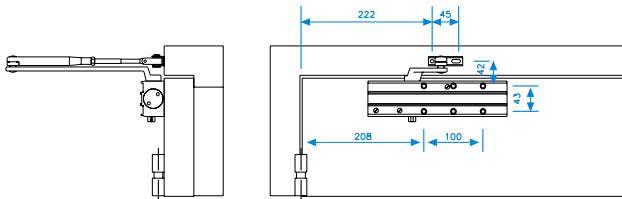


EN3/4/5

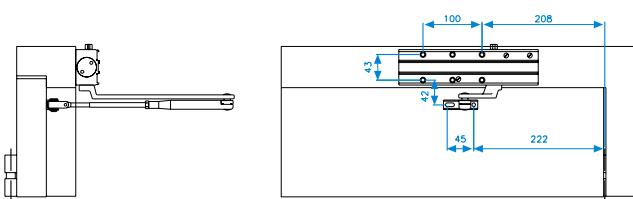

EN3/4

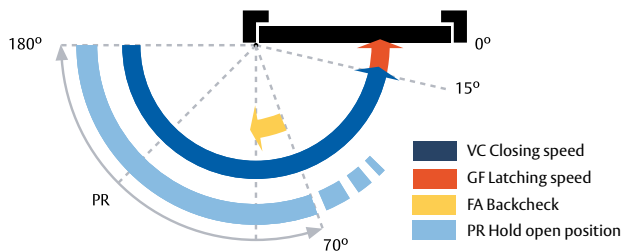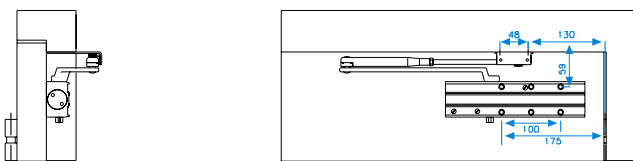

Non hold open (EN1154 certified)		
Size	Model	Finish
2-5	CT280025BL	White
2-5	CT280025NE	Black
2-5	CT280025OR	Gold
2-5	CT280025PL	Silver
2-5	CT280025IM	Stainless steel
Hold open arm (Not suitable for fire doors)		
Size	Model	Finish
2-5	CT280125BL	White
2-5	CT280125NE	Black
2-5	CT280125OR	Gold
2-5	CT280125PL	Silver
Soporte para instalación brazo paralelo		
Model	Finish	
SOP1800BL	White	
SOP1800NE	Black	
SOP1800OR	Gold	
SOP1800PL	Silver	

The CT2800 and CT2801 are size 3 when intalled in parallel arm