

Sliding guide rail closers

CT5000

EN 1154 CERTIFIED
Fire door





The full featured architectural grade closer that has revolutionized the concept of door closing.

- » Size is continuously adjustable EN1-EN6. The widest size scope achievement ever with a sliding guide closer.
- » The symmetric CAM MOTION mechanism provides universal versatility, allowing all mounting possibilities with a single model.
- » Independent valve adjustment for closing and latching speeds.
- » Independent valve adjustment for Backcheck that provides door protection.
- » Extendable height spindle (14 mm.)
- » Internal safety valve with pressure relief action.




EN 1154:1996 + A1:2002 certified: 3 8 1/6 1 1 3

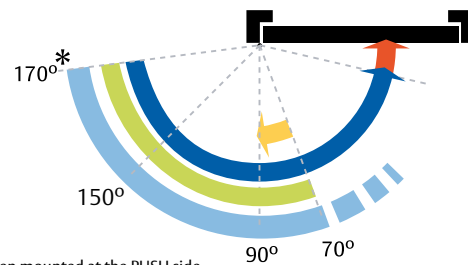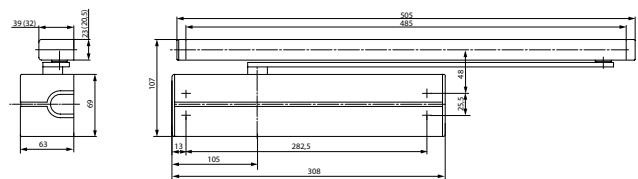

*When mounted at the PUSH side

- L Latch Speed
- C Closing speed
- BC Backcheck
- HO Hold Open position with MR3000
- Delayed guide action (CT500C26)

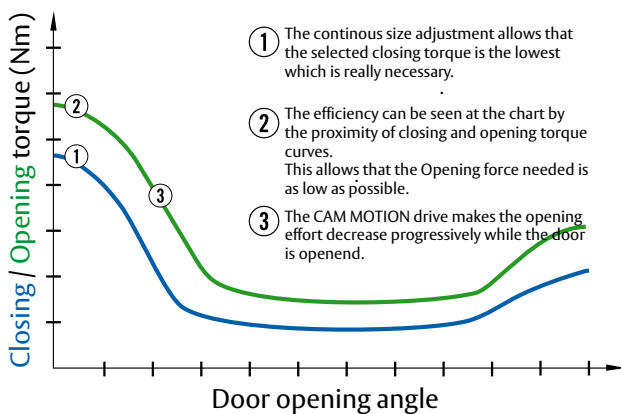

Size (EN 1154)	Door width cm	Door weight Kg
1	75	20
2	85	40
3	95	60
4	110	80
5	125	100
6	140	120

CT500026 - CT500C26				
Size	Backcheck	Delayed action	Model	Finish
1 - 6	Si	-	CT500026BL	White
1 - 6	Si	-	CT500026NE	Black
1 - 6	Si	-	CT500026PL	Silver
1 - 6	Si	-	CT500026IM	Stainless steel
1 - 6	Si	Yes	CT500C26BL	White
1 - 6	Si	Yes	CT500C26NE	Black
1 - 6	Si	Yes	CT500C26PL	Silver
1 - 6	Si	Yes	CT500C26IM	Stainless steel