


Floor springs

CTSU200

EN 1154 CERTIFIED
Fire door 

The TESA CTSU200 door closer offers the best adaptability to any floor configuration, as the cement box depth is only 47mm deep.


» Classification EN1154: 1996 + A1: 2002

CTSU202SR: 3 8 2 0 1 4

CTSU203SR: 3 8 3 1 1 4


CTSU204SR: 3 8 4 1 1 4

- » Reversible and suitable for single or double action doors.
- » Fixed sizes: EN2, EN3 and EN4.
- » Two independent valves for closing speed and latching speed adjustments.
- » Internal HO system. Two models available: with HO at 90° (R0) or 105° (R5).
- » Interchangeable spindle.
- » Closing speed is controlled from 175° of opening.

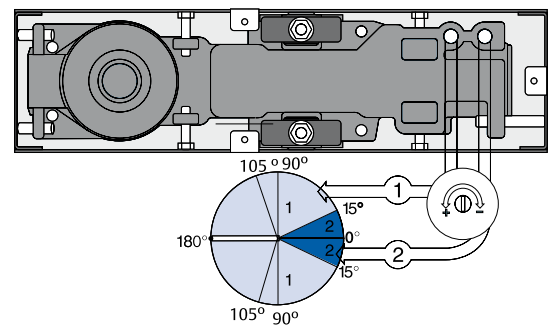

Model	Size (EN 1154)	Door width cm	Door weight Kg
CTSU202	2	85	100
CTSU203	3	95	100
CTSU204	4	110	100

Model	Size	Hold open	Product code
CTSU200,	EN 2	No hold open	CTSU202SRST
CTSU200	EN 2	90° hold open	CTSU202R0ST
CTSU200	EN 2	105° hold open	CTSU202R5ST
CTSU200	EN 3	No hold open	CTSU203SRST
CTSU200	EN 3	90° hold open	CTSU203R0ST
CTSU200	EN 3	105° hold open	CTSU203R5ST
CTSU200	EN 4	No hold open	CTSU204SRST
CTSU200	EN 4	90° hold open	CTSU204R0ST
CTSU200	EN 4	105° hold open	CTSU204R5ST

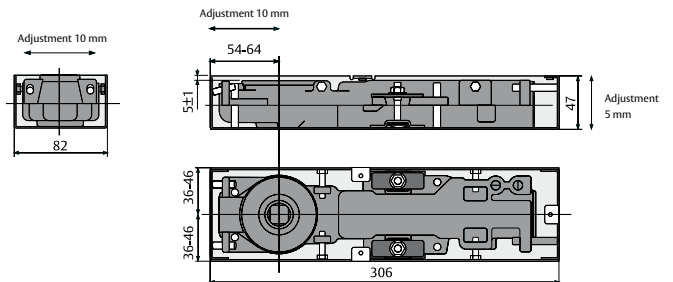

TACTSU200

Cover for the CTSU200

Model	Finish
TACTSU200IM	Stainless steel
TACTSU200IB	Polished stainless steel
TACTSU200LP	Brass

