


Concealed doorclosers

TEX26

EN 1154 CERTIFIED
Fire door 

The architectural grade concealed closer offering superior performance and aesthetics.

» Size is continuously adjustable EN1-EN5


Classification with EN1154: 1996 + A1: 2002

3 8 5/1 1 1 3

- » Suitable for many aluminium door thanks to the cross section of 40 x 51 mm
- » Suitable for any wooden door with thickness from 50 mm.
- » The symmetric CAM MOTION mechanism provides UNIVERSAL versatility, allowing quick and easy mounting in any door.
- » Independent valve adjustment for closing and latching speeds.
- » Integrated Backcheck effect (not adjustable by valve)
- » Internal safety valve with pressure relief action.
- » Compatible for use with the GDSEM, GD2XSC and GD2XEM guide rail system for the widest solutions range in single or double Fire Door equipment.

The CAM MOTION drive:

- » The TEX26 works with the exclusive symmetric CAM MOTION drive that the brilliant CT5000 has made famous.
- » By achieving the highest efficiency and torque output characteristics, the TEX14 makes the door opening feel smooth as silk while assuring a reliable door closing under all circumstances.
- » Approved for use in DEC environment like Elderly homes, health care environments and kindergartens.
(DEC= Disabled, Elderly and Children)

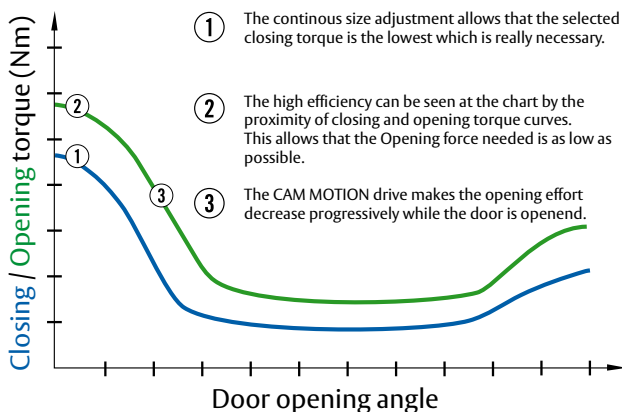




Size (EN 1154)	Door width cm	Door weight Kg	Adjustments
1 - 5	70 - 125	20 - 100	VC - GF

Product code	Description	Finish
TEX26	Concealed doorcloser EN1-5	PL
GDXSPL	Guide rail 31x21	PL
GDXS12PL	Guide rail 20x12	PL

Accessories	Description
PLATEX	Mounting KIT for TEX26
MR3000	Hold open device for GDXS
MT3000	Opening damper GDXS



TEX26 with GDXS

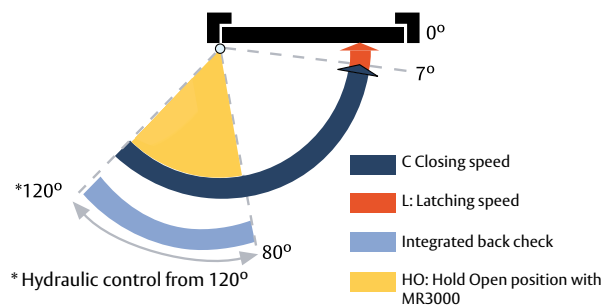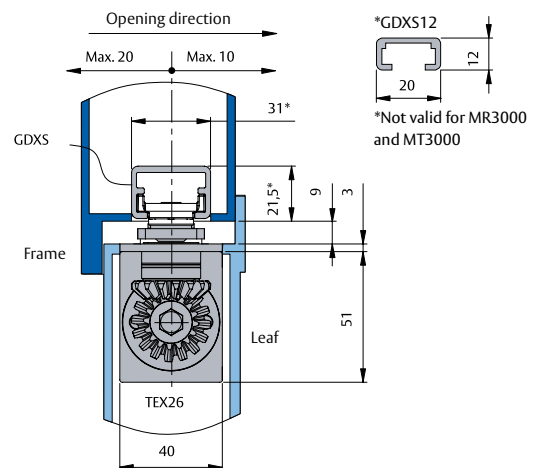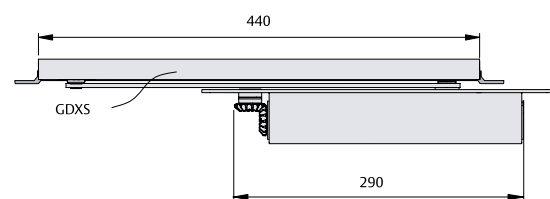

PLATEX

Kit of two mounting plates for metal doors. They allow that the closer installation is flush with the door top surface.

