




ABLOY® CYLP342T

Electromechanical CLIQ DIN/Europrofile Double cylinder

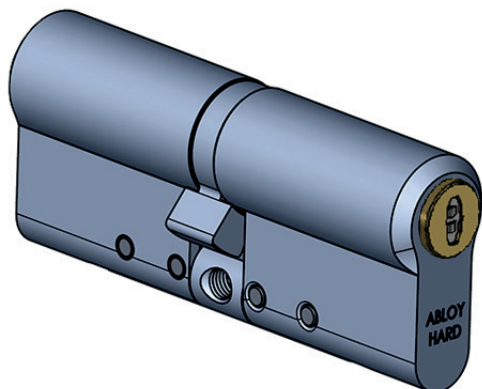


Product description

Electromechanical CLIQ Double cylinder to be used with mortice lock cases with DIN / Europrofile cylinder dimensions. Both sides cylinders are electronic CLIQ.

Lock is operated with a key from both sides.

Overview of Advantages

- Can be use with wide range applications for DIN cylinders
- Suitable for both outer and inner door use
- Dust cover
- Adjustable length with extension system to match different door thicknesses
- Adjustable locked position of cam
- Several plating options

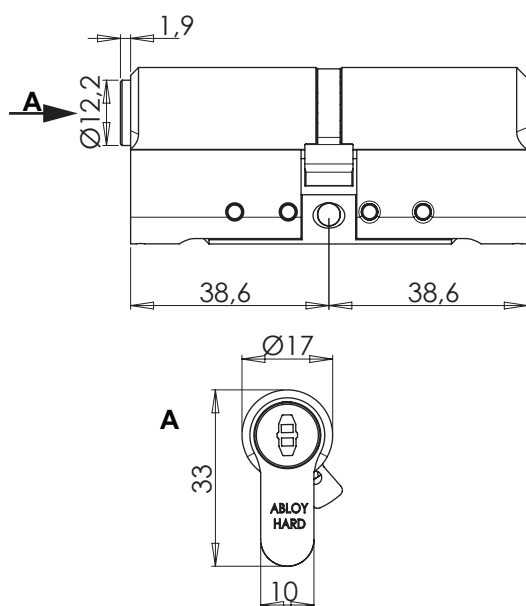

Technical data

Available key systems	ABLOY PROTEC CLIQ, ABLOY PROTEC ² CLIQ
Available plating options	Bright chrome (Cr), Satin chrome (HCr)
Cylinder cross section according standard DIN 18252	
Cylinder length	Outside 38.6mm, inside 38.6mm
Length adjustable (outside)	with 5mm steps 38,5–88,5mm, and with 10mm steps 88,5–138,5mm
Length adjustable (inside)	with 5mm steps 31–81mm, and with 10mm steps 81–131mm
Suitable for fire doors	Yes
EN 1303:2015 classification	Key related security 6, attack resistance D
Weight	0,24kg

Cylinder memory

- 1800 authorized key groups and programming keys together, theoretical maximum 65535 keys in each group
- A list of 3000 denied keys
- Audit trail of last 2000 events
- Audit trail of last 20 events from keys in other systems

This content is protected by Intellectual Property Rights Laws. The title to the content shall not pass to you, and instead shall remain with Abloy Oy or a third party holding the title. Abloy develops continuously the products and solutions offered. Therefore, the information contained in the document is subject to change without notice. ABLOY PROVIDES THIS CONTENT ON AN "AS IS" BASIS WITHOUT ANY WARRANTIES OF ANY KIND, EXPRESS, IMPLIED, OR STATUTORY."