


# **ABLOY® CYE212**

## Electromechanical PULSE Scandinavian oval inside cylinder for Norway.

**Product description**Electromechanical PULSE cylinder. Can be used wide range of Scandinavian type mortice lock

- $\begin{array}{l} \textbf{Overview of Advantages} \\ \cdot \text{ Cylinders with standard dimensions entail easy upgrade, fast, and flexible modernization of} \end{array}$ your locking system. Suitable for both outer and inner door use.
- Adjustable length with extension system to match different door thicknesses
  Designed and tested to withstand difficult climate conditions.

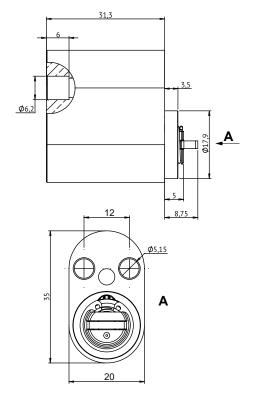

### Technical data

Available key systems	PULSE
Available plating options	Bright chrome (Cr) Satin chrome (HCr)
Length adjustable	with 10mm steps
Suitable for fire doors	No
Certificates	Tested according to the standard SFF 3522 to 200,000 opening cycles, double against the requirements
Weight	0,15kg
IP Rating	IP55
Cylinder memory	Authorized access groups 70 Blocklist 100 keys Audit trail of last 500 events (Data collection can be prevented)

This content is protected by Intellectual Property Rights Laws. The title to the content shall not pass to you, and instead shall remain with Abloy Oy or a third party holding the title. Abloy develops continuously the products and solutions offered. Therefore, the information contained in the document is subject to change without notice. ABLOY PROVIDES THIS CONTENT ON AN "AS IS" BASIS WITHOUT ANY WARRANTIES OF ANY KIND, EXPRESS, IMPLIED, OR STATUTORY."

