

ABLOY® DF3001

Quick bolt




Product description

Quick bolt DF3001 is used for securing the closed half of metal profile and wooden doors without a middle casing. For certain door profiles special version DF3001 is suitable where the fitting depth of the locking bars is 32–35 mm from the door surface.

Material: visible parts brass/other parts steel or stainless steel.

Overview of Advantages

- In closed position the bolt opens only by pulling the handle down.
- A clear sticker instructs the proper use.
- The bolt has a new quick attachment of locking bars which makes the installation easier.

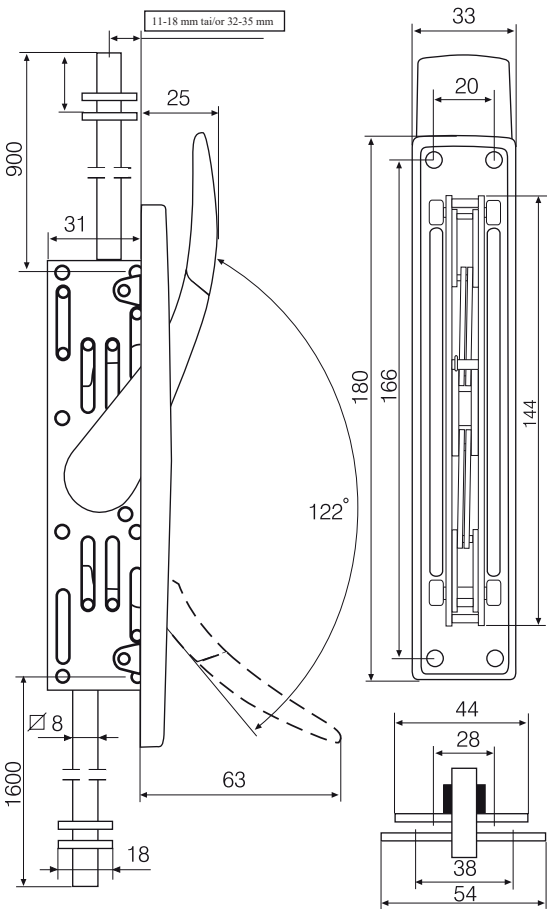

Technical data

Material	visible parts brass/other parts steel or stainless steel
Plating	Bright chrome (Cr), Satin chrome (HCr), Bright (KiLa),
The position of the locking bars	7 mm lateral 11-18 mm or 32-35 mm from the surface of the door
The fitting depth of the bolt	46 mm

This content is protected by Intellectual Property Rights Laws. The title to the content shall not pass to you, and instead shall remain with Abloy Oy or a third party holding the title. Abloy develops continuously the products and solutions offered. Therefore, the information contained in the document is subject to change without notice. ABLOY PROVIDES THIS CONTENT ON AN "AS IS" BASIS WITHOUT ANY WARRANTIES OF ANY KIND, EXPRESS, IMPLIED, OR STATUTORY."