

ABLOY® ELO60

DIN standard mechanical lock for narrow profile doors



Product description

ELO60 is a mechanical lock with same fitting as Europrofile Electric lock range. ELO60 is meant to be used on narrow profile doors.


When door closes, dead bolt is thrown out automatically, double action latch is blocked and the lock case is secured in two points.

Overview of Advantages

- Mechanical automatic dead locking system
- Changeable handing, installer can change setting during installation
- Exit function from inside by handle or panic bar
- Suitable for fire-rated doors
- Override function for unlocking with key from outside
- 8 / 9 mm spindle Non handed

Scope of delivery

- 1 pc lock
- 1 pc accessory set (fixing screws and spindle adapters 9/8)
- 1 operating manual

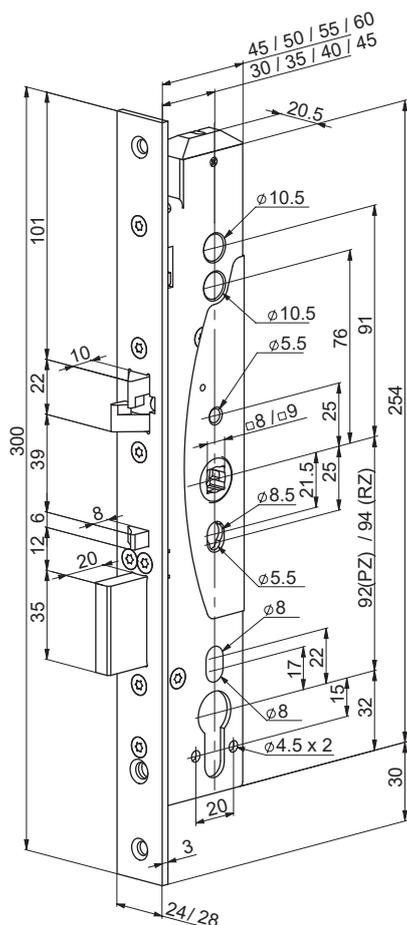

Technical data

Handing	Right, changeable to left
Panic function	Yes
Backset available	30mm / 35mm / 40mm / 45mm
Face plate width	24mm
Follower	9/8 mm
Distance	92mm
Suitable for fire-rated doors	Yes
Strength EN 14846	Grade 6
Approval EN 14846 Certificate of Constancy of performance	0809 - CPR - 20002737
Approval EN 179 Certificate of Constancy of performance	0432-CPR-00008-01
Approval DIN 1125 Certificate of Constancy of performance	0432-CPR-00008-02

This content is protected by Intellectual Property Rights Laws. The title to the content shall not pass to you, and instead shall remain with Abloy Oy or a third party holding the title. Abloy develops continuously the products and solutions offered. Therefore, the information contained in the document is subject to change without notice. ABLOY PROVIDES THIS CONTENT ON AN "AS IS" BASIS WITHOUT ANY WARRANTIES OF ANY KIND, EXPRESS, IMPLIED, OR STATUTORY."