


# Cilindros de contacto eléctrico

## Switch locks



ASSA ABLOY

### Gama estándar 605 / Standard range 605

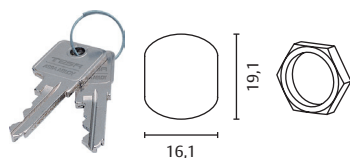

1C = 1 contacto / contact      1 Sal. / 1 K.E. = 1 salida / 1 key exit  
 2C = 2 contactos / contacts    2 Sal. / 2 K.E. = 2 salidas / 1 key exits  
 R = Retorno / Return

**Aplicaciones:** Nueva gama de cerraduras de contacto eléctrico, enfocadas principalmente al uso en botoneras de ascensor, gracias a sus mínimas dimensiones. Disponibles con o sin micro incorporado.

**Características:**

- Cerraduras de latón.
- 5 pitones.
- 1 salida en 0° ó 2 salidas en ± 45°.
- Para espesores de hasta 18 mm.
- Amaestrables. (Mod. 1 salida).
- Hasta 7.776 códigos distintos.
- Acabado en cromo.
- Incluye 2 llaves dentadas de acero.
- Posibilidad de retorno automático por resorte.

**Applications:** New range of switch locks, specially designed to be used in elevators, thanks to their minimum dimensions. Available with or without microswitch incorporated.

**Characteristics:**

- Brass locks.
- 5 pins.
- 1 key exit at 0° or 2 key exits at ± 45°.
- For thicknesses of up to 18 mm.
- Masterkeyable. (Mod. 1 key exit).
- Up to 7.776 different codes.
- Chrome finish.
- 2 steel sawn keys included.
- Automatic spring-return also available.

| 606.008      | Acabado / Finish | Giro / Turn            | Contacto / Contact | Código / Code |
|--------------|------------------|------------------------|--------------------|---------------|
|              | Cromo / Chrome   | 90° C -1 Sal. / 1 K.E. | 1C                 | 860600001313  |
|              | Cromo / Chrome   | 90° C -1 Sal. / 1 K.E. | 1C + R             | 860600003313  |
|              | Cromo / Chrome   | 90° C -1 Sal. / 1 K.E. | 2C                 | 860600002313  |
|              | Cromo / Chrome   | 90° C -1 Sal. / 1 K.E. | 2C + R             | 860600004313  |
| Micro: F4T6. |                  |                        |                    |               |

| 606.019      | Acabado / Finish | Giro / Turn               | Contacto / Contact | Código / Code |
|--------------|------------------|---------------------------|--------------------|---------------|
|              | Cromo / Chrome   | -45° +45° 2 Sal. / 2 K.E. | 1C                 | 860600001323  |
|              | Cromo / Chrome   | -45° +45° 2 Sal. / 2 K.E. | 2C                 | 860600002323  |
| Micro: F4T6. |                  |                           |                    |               |

| 606.019 "Con Led" / 606.019 "With Led" | Acabado / Finish | Giro / Turn            | Contacto / Contact | Código / Code |
|--|------------------|------------------------|--------------------|---------------|
|  | Cromo / Chrome   | 90° C -1 Sal. / 1 K.E. | 1C + R             | 860601003313  |
|  | Cromo / Chrome   | 90° C -1 Sal. / 1 K.E. | 1C                 | 860601003513  |
| Micro: F4T6.                           |                  |                        |                    |               |

| 606 Smart       | Acabado / Finish | Giro / Turn            | Contacto / Contact               | Código / Code |
|-----------------|------------------|------------------------|----------------------------------|---------------|
|                 | Cromo / Chrome   | 90° C -1 Sal. / 1 K.E. | 1C                               | 86060SMA0113  |
|                 | Cromo / Chrome   | 90° C -2 Sal. / 2 K.E. | 1C                               | 86060SMA0123  |
|                 | Cromo / Chrome   | 90° C -1 Sal. / 1 K.E. | 1C + R                           | 86060SMA1113  |
|                 | Cromo / Chrome   | 90° C -1 Sal. / 1 K.E. | 1C sin micro / without micro     | 86060SMA2113  |
|                 | Cromo / Chrome   | 90° C -2 Sal. / 2 K.E. | 1C sin micro / without micro     | 86060SMA2123  |
|                 | Cromo / Chrome   | 90° C -1 Sal. / 1 K.E. | 1C + R sin micro / without micro | 86060SMA3113  |
| Micro: AH-1662. |                  |                        |                                  |               |

B