

# Accessories

## Door status detector

Magnetic door status detectors are operated via a Reed switch that is activated by a magnetic field. The sensor is mortised on the frame and the magnet is mounted on the door's leaf. If the door is locked, the magnet acts on the contact (closed contact).

Mortise mounting on aluminium, doors, wood and windows.

### Technical features


- » Type of contact: NO/NC
- » Number of wires: 4
- » Contact resistance: 0.15  $\Omega$
- » Maximum reaction distance: 15 mm
- » IP 67 protection
- » Wire length: 6m
- » Colour: White
- » Housing material: Plastic
- » Working temperature: 0 °C to +40 °C
- » Max. contact rating: 175 V DC

Product code

SDPENOC00



### Sizes

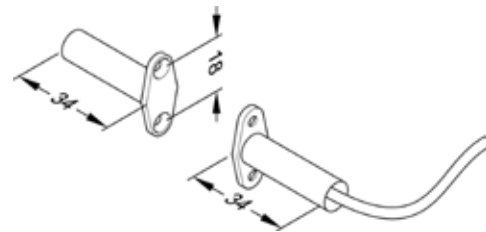

## Lever status detector

This micro contact alerts of the lever status (blocked door/unblocked door). It is mounted behind the strike on the door's frame, being activated by the lever's motion. There are no restrictions in terms of lever projection.

### Technical features

- » Type of contact: NO/NC
- » IP 54 protection
- » Minimum reaction distance: 3mm
- » Wire length: 4m
- » Breaking power: 25 V AC/DC-1,5 A

Product code

BSC4M0000



### Sizes

