

# Fire doors hardware

Model	Follower rod	Panic function	Outside access device	Internal operation	Performance	Field of use
CF50ASR9	Split	Yes	Handle/pull handle + key	Handle + key	The key removes the lever and the latch	Entrance
CF50NG	Through	No	Pull handle/handle + key	Handle + key	The key removes the lever and the latch	Entrance
CF60RSR9	Split	Yes	Handle/pull handle + key	Handle + key	The key deadlocks the external handle	Entrance
CF6TRSR9*	Split	Yes	Handle/pull handle + key	Panic bar	The key deadlocks the external handle	Emergency exit
CF6900R9	Through	Yes	Pull handle/handle + key	Handle	External opening with a key	Entrance
CF6500R9Z	Through	Yes	Handle	Handle	Free passage by both sides	Free passing doors


\* Strike included

## CF-50 Series

- » Lock suitable for use on fire rated doors.
- » Steel latch: working temperature > 900°C.
- » 9x9mm follower.
- » Distance between axes: 72 mm.
- » Backset: 65 mm.
- » Reversible.
- » Zinc plated steel (Z) or stainless steel (I) frontplate.
- » Durability: 200.000 cycles @ 120N pre-load.
- » Additional security features:
  - 1) New deadbolt design (increased stiffness).
  - 2) When cylinder is locked and deadbolts projected the latch remains blocked and it can not be retracted.
  - 3) When cylinder is locked the latch activates a deadlatch system.



CERTIFIED ACCORDING  
**UNE-EN  
12209:2004**

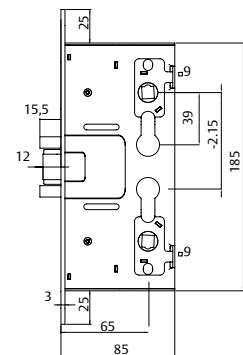


Product code	Function	Packaging
CF50NGTR9Z/ICE	No panic	1 / 25
CF5ENGTR9Z/ICE	No panic	1 / 1
CF50ASR9Z/ICE *	Panic	1 / 25

\* Split follower

## CF-60 Series

- » CF60 lock, cylinder not included, panic function for all versions
- » Suitable to be used in FR doors
- » Certified according UNE-EN1125:2009
- » Certified according UNE-EN 12209: 2004.
- » Steel latch, suitable to be used in FR doors
- » Non-friction guide between latch and frontplate
- » 9x9 mm follower
- » Backset 65 mm
- » Distance between each axis 72 mm
- » Reversible (non handed)
- » Front plate finish: zinc plated (Z) or stainless steel (I)

CERTIFIED ACCORDING  
**UNE-EN  
12209:2004  
1125:2009**



Product code	Function	Packaging
CF60RSR9(Z/I)CENG	Handle/panic bar+key	1 / 25
CF6TRSR9(Z/I)CENG	Handle/panic bar+key *	1 / 1 y 1 / 20
CF6ERSR9(Z/I)CENG	Handle/panic bar+key	1 / 1 y 1 / 20
CF6IRSR9ICENG	Inwards opening	1 / 25
CF6500R9(Z/I)CENG	Free passing door**	1 / 25
CF6900R9(Z/I)CENG	External key opening (without lever) ***	1 / 25

\* Strike included

\*\* No cylinder admitted (only external lever handle)

\*\*\* No external lever handle is admitted (only external cylinder)