
Abloy Oy Wahlforssinkatu 20 P.O. Box 108 FI-80101 Joensuu, Finland | Tel. +358 20 599 2501 | abloy.com



ABLOY® EP401 Microswitch lock

Product description Key-operated switch locks provide key-actuated switching for burglar alarms, control boxes and other high security applications.

Overview of Advantages
The key can only be removed in the off position of the switch.
The locks can be mounted on objects with a thickness of 0.5 to 22 mm.

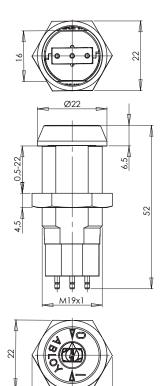

25

Technical data

Available key systems	ABLOY SENTRY, ABLOY PROTEC, ABLOY PROTEC ² , ABLOY SENTO, ABLOY EASY, ABLOY CLASSIC
Body material	Brass
Available plating options	Bright chrome (Cr)
Handing	Right
Key removal	Locked position
Weight	0,07 kg
Maximum door thicknesses:	22 mm

This content is protected by Intellectual Property Rights Laws. The title to the content shall not pass to you, and instead shall remain with Abloy Oy or a third party holding the title. Abloy develops continuously the products and solutions offered. Therefore, the information contained in the document is subject to change without notice. ABLOY PROVIDES THIS CONTENT ON AN "AS IS" BASIS WITHOUT ANY WARRANTIES OF ANY KIND, EXPRESS, IMPLIED, OR STATUTORY."

