


ABLOY® CLL718

Electromechanical CLIQ Cam Lock

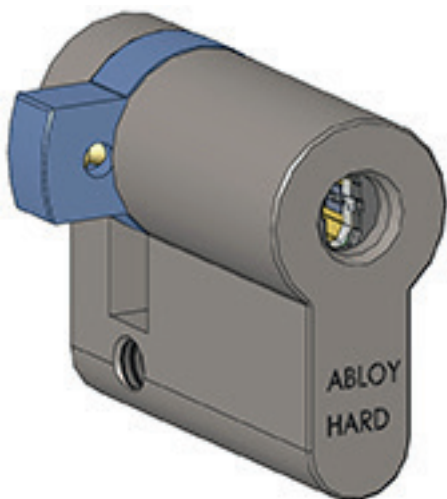


Product description

Electromechanical CLIQ cylinder to be used e.g. in cabinet handles.
DIN / Europrofile cylinder dimensions.

Overview of Advantages

- Can be used in several cabinet locking applications, e.g. in handles
- Strong burglary protection
- Adjustable locked position of cam

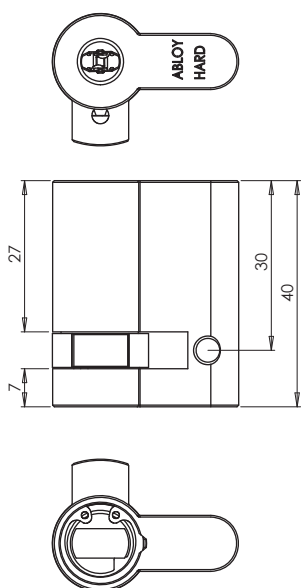

Technical data

Available key systems	ABLOY PROTEC CLIQ, ABLOY PROTEC ² CLIQ
Body material	Hardened steel
Available plating options	Bright chrome (Cr)
Cylinder cross section according standard DIN 18252	
Left hand operation possible	No
Cam turn	90°/ 180°
Key removal	Locked position
EN 1303:2015 classification	Key related security 6, attack resistance D
Weight	0,10kg

Cylinder memory

- 1800 authorized key groups and programming keys together, theoretical maximum 65535 keys in each group
- A list of 3000 denied keys
- Audit trail of last 2000 events
- Audit trail of last 20 events from keys in other systems

This content is protected by Intellectual Property Rights Laws. The title to the content shall not pass to you, and instead shall remain with Abloy Oy or a third party holding the title. Abloy develops continuously the products and solutions offered. Therefore, the information contained in the document is subject to change without notice. ABLOY PROVIDES THIS CONTENT ON AN "AS IS" BASIS WITHOUT ANY WARRANTIES OF ANY KIND, EXPRESS, IMPLIED, OR STATUTORY."